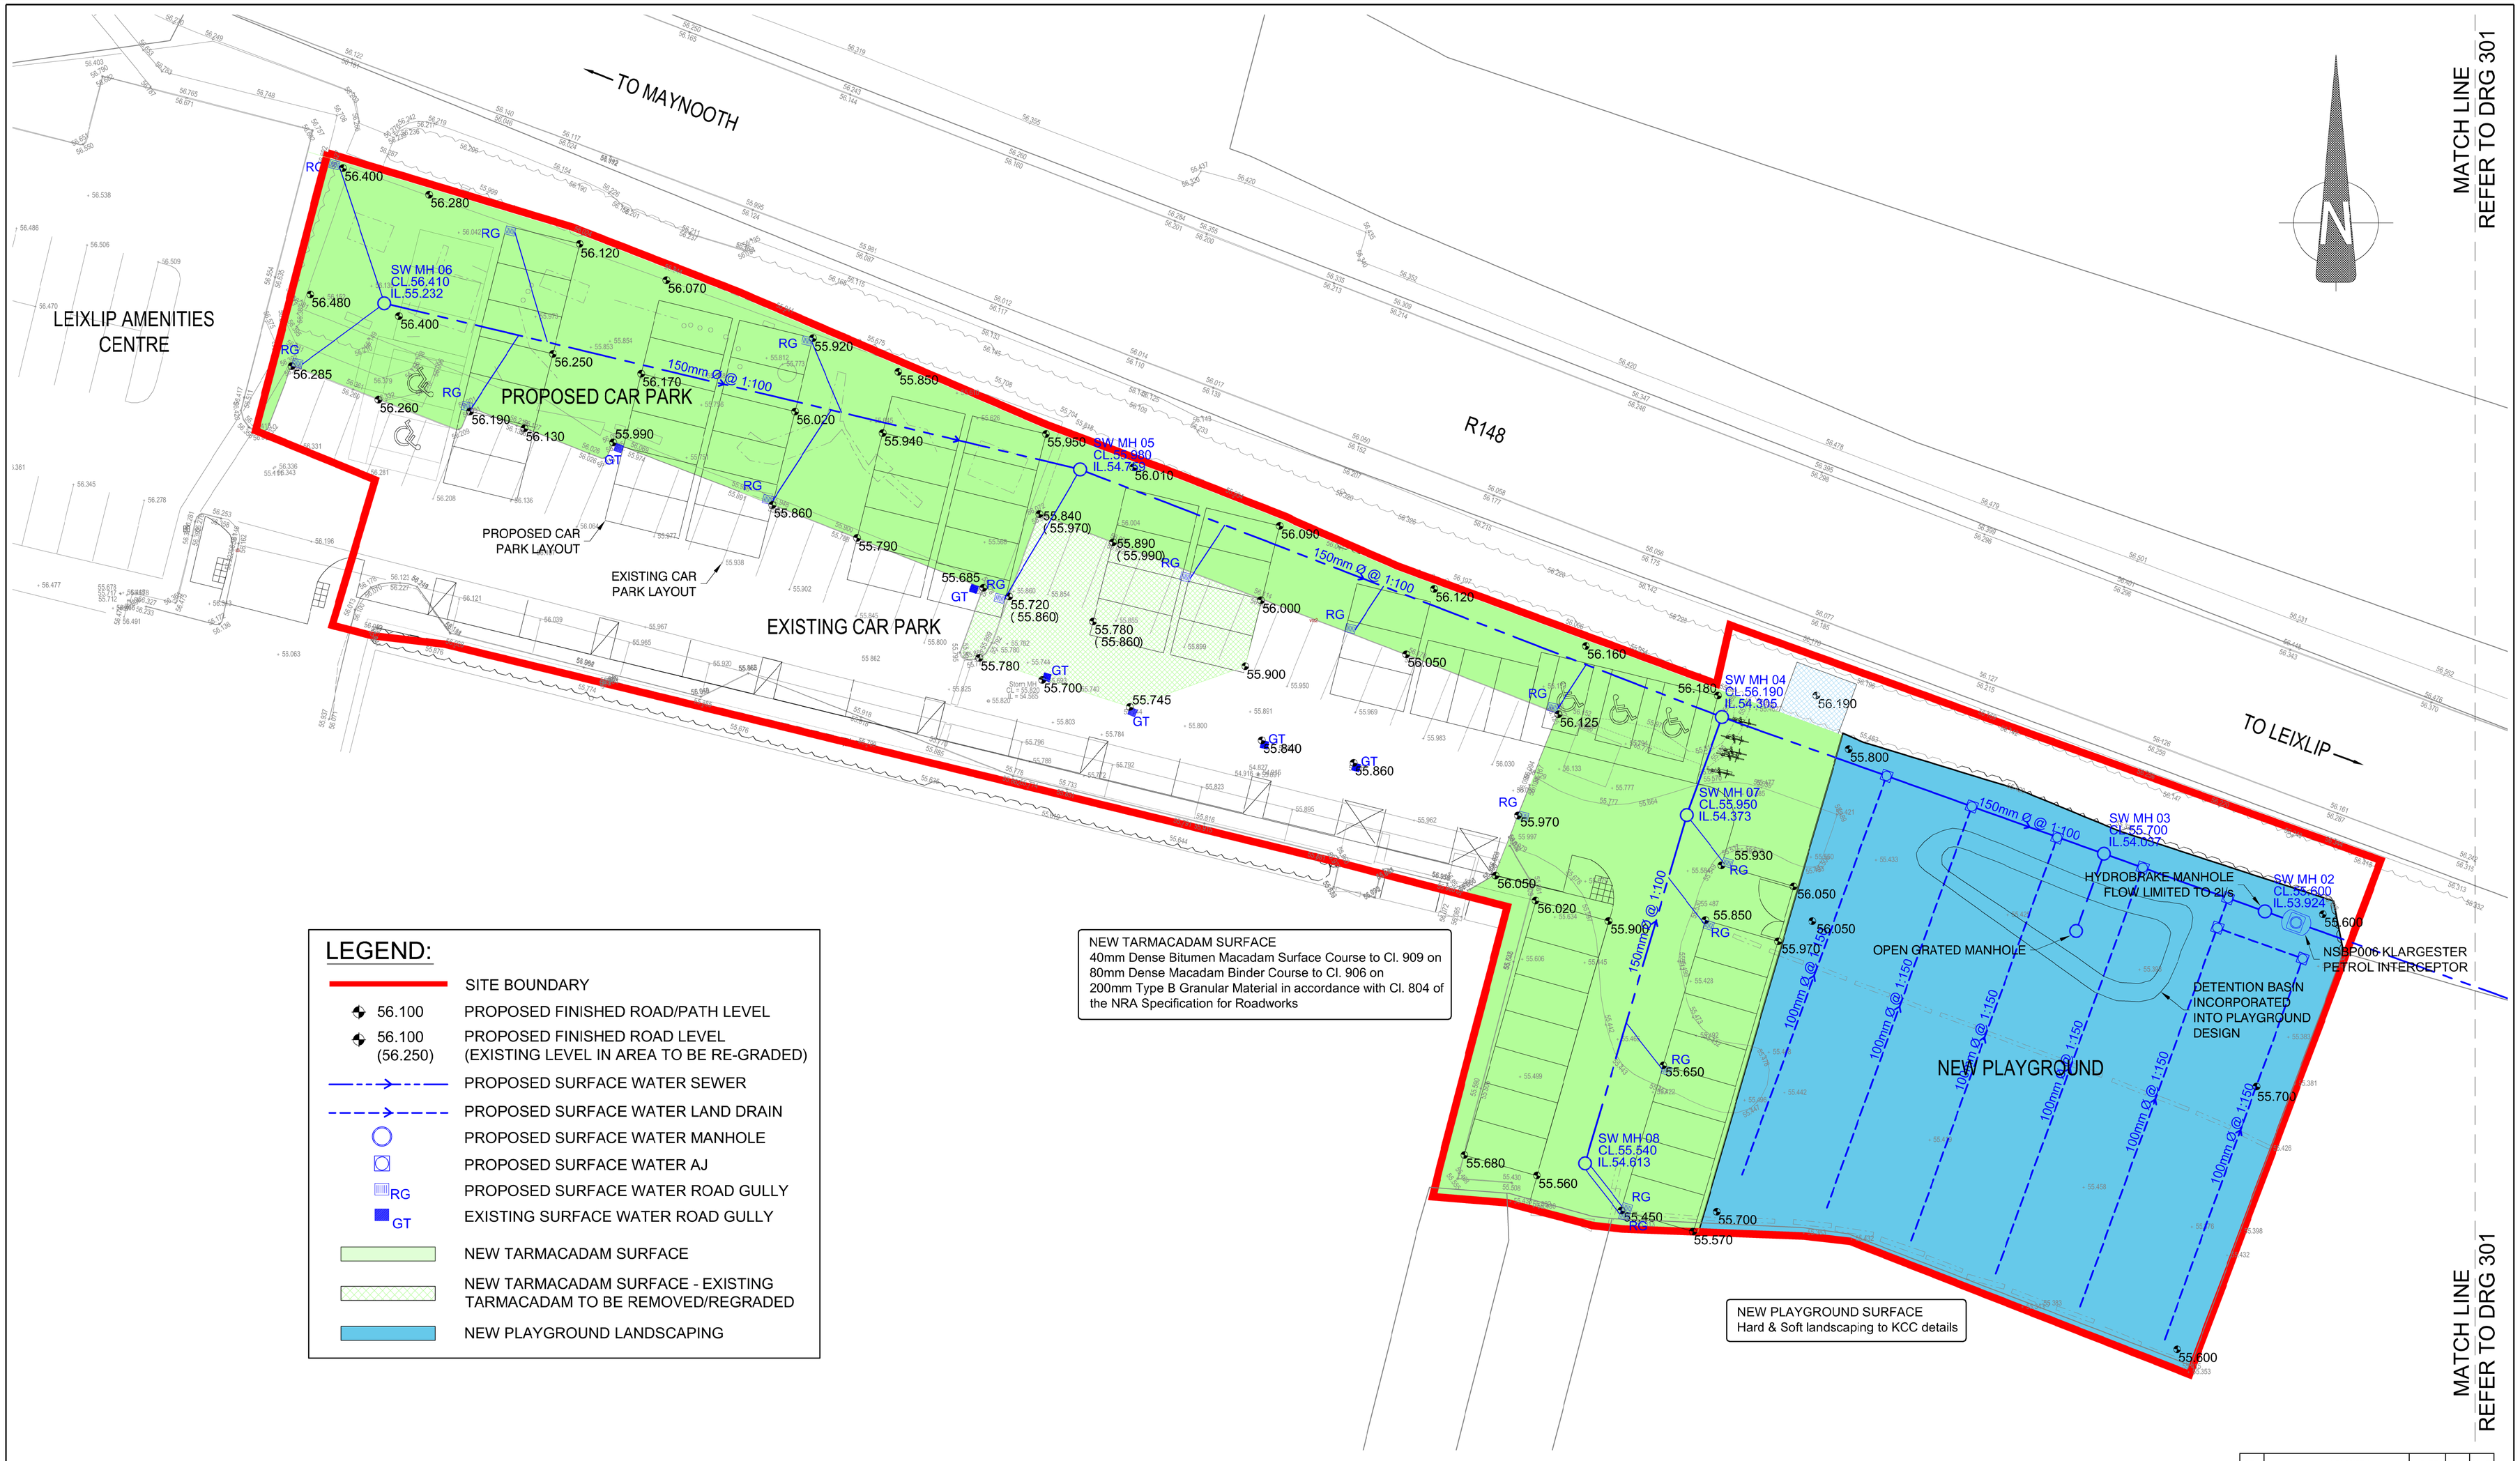

NEW TARMACADAM SURFACE
40mm Dense Bitumen Macadam Surface Course to Cl. 909 on
80mm Dense Macadam Binder Course to Cl. 906 on
200mm Type B Granular Material in accordance with Cl. 804 of the NRA Specification for Roadworks

NEW PLAYGROUND SURFACE
Hard & Soft landscaping to KCC details

LEGEND:

- SITE BOUNDARY
- 56.100 — PROPOSED FINISHED ROAD/PATH LEVEL
- 56.100 (56.250) — PROPOSED FINISHED ROAD LEVEL (EXISTING LEVEL IN AREA TO BE RE-GRADED)
- PROPOSED SURFACE WATER SEWER
- PROPOSED SURFACE WATER LAND DRAIN
- PROPOSED SURFACE WATER MANHOLE
- PROPOSED SURFACE WATER AJ
- RG — PROPOSED SURFACE WATER ROAD GULLY
- GT — EXISTING SURFACE WATER ROAD GULLY
- NEW TARMACADAM SURFACE
- NEW TARMACADAM SURFACE - EXISTING TARMACADAM TO BE REMOVED/REGRADED
- NEW PLAYGROUND LANDSCAPING

REV	DESCRIPTION	DATE	DRWN BY	CHKD BY

Wynne Civil Engineering Ltd.
Consulting Engineers
Greenhills, Kill, Co. Kildare
T: +353 (086) 2735148
e: Eoin@wynneconsulting.ie

PLANNING
30.03.2023

CLIENT NAME: Kildare County Council				DRAWING NAME: Site Layout Surface Water Drainage	
JOB NAME: Relocation Of Playground at Leixlip Amenities Centre					
DRAWING NUMBER: 300	REVISION:	SHEET SIZE: A1	SCALE: 1:200	DATE: Mar 2023	DRAWN BY: EW